




# Collect

Collect is a special outdoor mat that pairs scraping qualities with moisture absorption. The outdoor mat is available in three colours and suits every entrance.

Collect is a robust mat that is ideal for heavy commercial use. It works best in entrance areas, stairwells, pantries and lifts, for example, in commercial buildings and medium-sized and large offices.

Collect stands out in terms of moisture absorption. Consequently, the mat is optimised for scraping. Small areas of dirt in the mat are not visible. The Collect can be used inside and out and provides a durable solution in high traffic areas thanks to its bouclé construction. The slightly blended design features coarse yarns only.

Collect is a versatile outdoor mat that fits many different situations. This is down to its practical and vibrant appeal. Even if the mat is used indoors it continues to do a great job by preventing dirt and damage to floors in the building.

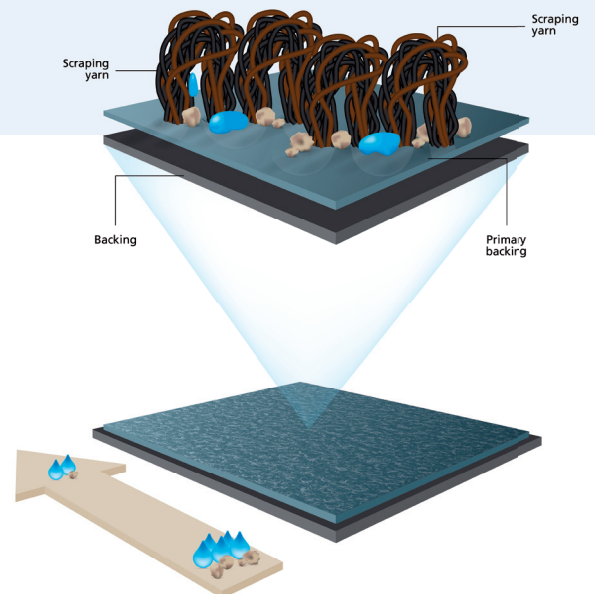



## Specifications

Pile material	100% Polyamide
Backing	PVC
Primary backing	nonwoven PET/PA
Yarn construction	Bouclé
Pattern	Blended
Colours	3
Pile weight ISO 8543	600 g/m <sup>2</sup>
Total weight ISO 8543	3.000 g/m <sup>2</sup>
Pile height ISO 1766	± 6,5 mm
Total height ISO 1765	± 8,0 mm
Pile density ISO 8543	0,079 g/cm <sup>3</sup>
Number of stitches ISO 1763	± 64.500 /m <sup>2</sup>
Use classification EN 1307	33
Wearing class EN 1963	33
Comfort EN 1307	LC1
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Occasional use
Dimensional stability ISO 2551	< 0,4 %
Light fastness ISO 105 B02	> 7
Water fastness ISO 105 B01	4 - 5
Rubbing fastness ISO 105 X12	4 - 5
Salt water ISO 105 E02	4 - 5
Shampoo BS 1006	4 - 5
Organic solvents ISO 105 X05	4 - 5
Absorption capacity TNO W6034	± 3,8 l/m <sup>2</sup>
Flammability Euroclass EN 13501	Cfl/s1
Slip Resistance EN 13893	DS
Static charge ISO 6356	< 0,1 kV
Sand absorption class*	2
Optical class**	NPD
Declaration of Performance	Available
Sizes rolls***	100 & 200 cm
Roll length	± 20 m
Sizes mats***	60/90 cm & 90/150 cm


\* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%. Sand absorption class 3: >=90% \*\* Optical class 5 is best, 1 is lowest.  
\*\*\* All mentioned sizes include a 2.5 cm PVC border. The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.



## Where to use?

	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	


## Colours



Anthracite 007



Brown 014



Red 016

## Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.

