

NEW COLLECTIONS

Cobalt SDN & Cobalt Creations



COBALT SDN

Kernwoorden: sterke basis, veelzijdig, betrouwbaar
Keywords: strong basic, versatile, reliable

Cobalt SDN

Klassieker heruitgevonden



Cobalt SDN is onze basiscollectie, een sterke basis om te mixen en matchen met andere kwaliteiten in ons assortiment. Cobalt SDN biedt 28 kleuren, van neutrale grijs tinten tot klassieke blauw tinten of gedurfde rood tinten. De keuze is aan jou! Combineer SDN met onze stijlvolle nieuwe collecties Grunge, Hexagon Art, Cobalt Creations, Expression of Relined om elk interieur een boost te geven. De collectie is beschikbaar in zowel kamerbreed tapijt als tapijttegels van 50x50cm.

Cobalt SDN

Classic reinvented

Cobalt SDN is our staple collection, a strong foundation to mix and match with other qualities in our range. Cobalt SDN offers 28 solution dyed colours, 25 of which are completely new. From neutral grey tones, to classic blues or daring reds. The choice is yours! Combine SDN with our stylish new designs Grunge, Hexagon Art, Cobalt Creations, Expression or Relined to boost any interior. The collection is available in both 4m broadloom and 50x50cm carpet tiles.

Technische details

- **Stijl:** lussenpool
- **Type garen:** nylon (polyamide)
- **Totale dikte:** 6,0 mm
- **Gebruiksklasse:** klasse 33 (heavy commercial)
- **Poolgewicht:** 550 g/m²
- **Brandklasse:** Bfl-S1

Technical details

- **Construction:** loop pile
- **Yarn type:** nylon (polyamide)
- **Total height:** 6,0 mm
- **Classification:** class 33 (heavy commercial)
- **Pile weight:** 550 g/m²
- **Fire resistance:** Bfl-S1



Cobalt SDN 64073 | Cobalt SDN 64070 | Cobalt SDN 64045



Cobalt SDN 64041 | Grunge 6425550 | Cobalt SDN 64044



Cobalt SDN 64055 | Cobalt SDN 64049 | Cobalt SDN 64038 | Cobalt SDN 64080



Cobalt SDN 64061 | Cobalt SDN 64062





Cobalt SDN 64031 | Cobalt SDN 64020



Hexagon Art 6433120 | Cobalt SDN 64020

Technical details carpet tiles						
Manufacturing type	Herstellungsart	Mode fabrication	Productie methode	tufted 1/10"		
Construction	Struktur	Structure	Structuur	loop pile		
Pile composition	Polmateriaal	Couche d'usure	Poolsamenstelling	100% PA 6		
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed		
Primary backing	Trägermaterial	Premier dossier	Tuftdoek	polyester fleece		
Secondary backing	Rückenausrüstung	Dossier	Rug	GREENBASE modified bitumen		
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m²	550 (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m²	4.300 (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	3,0 (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	6,0 (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m²	164.000 (+/-)
Size	Abmessung	Dimension	Afmeting	cm 50 x 50		
Packing	Verpackung	Emballage	Verpakking	20 per box 5 m²		
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307	33	heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307	LC 2	
Castor chair	Stuhlrolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985	r = 2,5	A (intensive)
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986	≤ 0,2%	
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1	Bfl-S1	loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≤ 10⁹
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m²/K/W	0,070
Sound absorpction	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,15
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	24 dB
				ISO 10140	ΔL	39 dB (1000 Hz)
Light fastness	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02	8	
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijfechtheid	ISO 105 X12	4-5 wet/dry	
Water fastness	Wasserechtheit	Solidité à l'eau	Waterechtheid	ISO 105 E01	5 colour/staining	

EN 1307
for use as floorcovering
in buildings (EN 14041)
according to the
manufacturer's specification

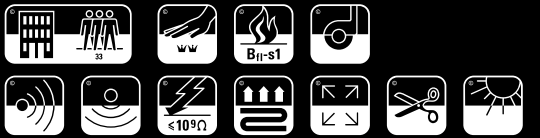

These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.

Technical details broadloom						
Manufacturing type	Herstellungsart	Mode fabrication	Productie methode	tufted 1/10"		
Construction	Struktur	Structure	Structuur	loop pile		
Pile composition	Polmateriaal	Couche d'usure	Poolsamenstelling	100% PA 6		
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed		
Primary backing	Trägermaterial	Premier dossier	Tuftdoek	non-woven		
Secondary backing	Rückenausrüstung	Dossier	Rug	action backing		
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m²	550 (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m²	1.825 (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	3,0 (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	5,5 (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m²	164.000 (+/-)
Width	Breite	Largeur	Breedte	cm 400 (+/-)		
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307	33	heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307	LC 1	
Castor chair	Stuhlrolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985	A	intensive
Stair suitability	Treppeneignung	Escaliers	Trappengeschikt	EN 1963	A	intensive
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1	Bfl-S1	glued
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≤ 10⁹
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m²/K/W	0,065
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,20
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	26 dB
				ISO 10140	ΔL	44 dB (1000 Hz)
Light Fastness	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02	8	
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijfechtheid	ISO 105 X12	4-5 wet/dry	
Water fastness	Wasserechtheit	Solidité à l'eau	Waterechtheid	ISO 105 E01	5 colour/staining	

EN 1307
for use as floorcovering
in buildings (EN 14041)
according to the
manufacturer's specification



These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.



64055 LRV 3,0



64051 LRV 4,1



64050 LRV 5,8



64033 LRV 6,2




64030 LRV 7,5




64032 LRV 4,3



64040 LRV 16,7

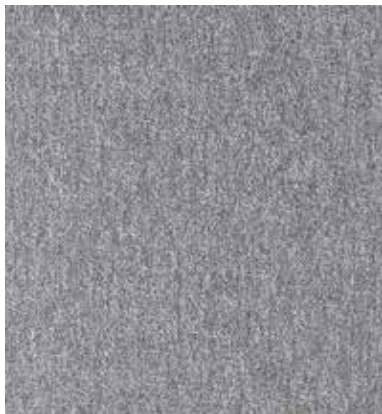

64042 LRV 11,1

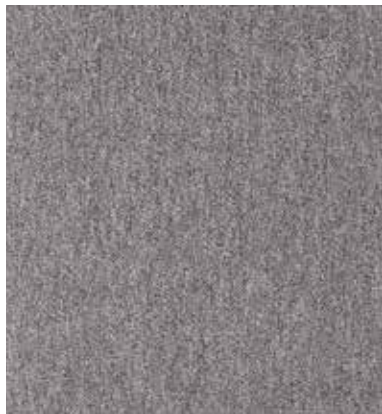

64045 LRV 9,0



64020 LRV 23,3



64010 LRV 29,5



64031 LRV 11,6



64041 LRV 19,3



64044 LRV 13,2



Cobalt SDN 64033 | Cobalt SDN 64041 | Relined 6444441



64096 LRV 3,9



64083 LRV 7,0



64080 LRV 5,7



64062 LRV 5,8



64061 LRV 9,9



64066 LRV 15,1



64090 LRV 20,1



64049 LRV 18,6



64038 LRV 8,8



64063 LRV 7,6



64065 LRV 4,6



64060 LRV 4,1



64070 LRV 5,5



64073 LRV 10,7



Cobalt SDN 64061 | Cobalt SDN 64062 | Cobalt SDN 64065 | Cobalt SDN 64066 | Cobalt SDN 64090

COBALT CREATIONS

Kernwoorden: transitie, levendig, veelzijdig
Keywords: transition, vibrant, versatile

Cobalt Creations

Creëer transitie met kleur!



Cobalt Creations, een nieuw concept van kleurovergang. De collectie combineert de standaard Cobalt SDN 64042 unikleur met een neutrale of kleurrijke tegeloptie. Cobalt Creations geeft een kamer karakter en plezier. Creëer speelse interieurs met de levendige kleurtegels of ga voor modern en strak met een neutrale tegel. Cobalt Creations bestaat uit 11 kleuropties. De collectie is enkel verkrijgbaar in 50x50cm tapijttegels.

Cobalt Creations

Create transition with colour!

Cobalt Creations, a new concept of colour transition. The collection blends the staple Cobalt SDN 64042 unicolour with a neutral or colourful tile option. Cobalt Creations adds character and fun to a room. Create playful interiors with the vivid colour tiles or go for modern and sleek with a neutral one. Cobalt Creations consists of 11 colour options and is only available in 50x50cm carpet tiles.

Technische details

- **Stijl:** gestructureerde lussenpool
- **Type garen:** nylon (polyamide)
- **Totale dikte:** 6,0 mm
- **Gebruiksklasse:** klasse 33 (heavy commercial)
- **Poolgewicht:** 550 g/m²
- **Brandklasse:** Bfl-S1

Technical details

- **Construction:** structured loop pile
- **Yarn type:** nylon (polyamide)
- **Total height:** 6,0 mm
- **Classification:** class 33 (heavy commercial)
- **Pile weight:** 550 g/m²
- **Fire resistance:** Bfl-S1





Cobalt Creations 6384241 | Cobalt Creations 6384251 | Cobalt SDN 64041 | Cobalt SDN 64051




6384283



6384280



Cobalt SDN 64042

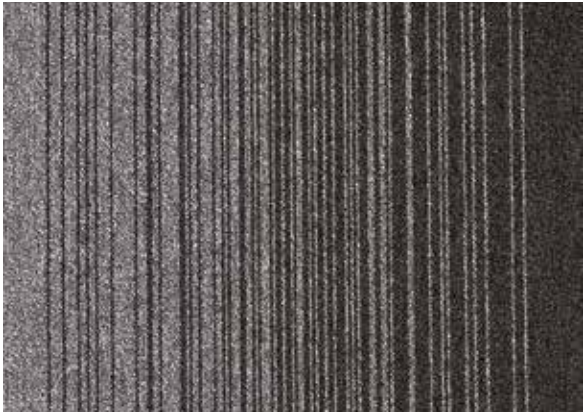

6384251



Cobalt SDN 64051




6384250



6384251



6384241

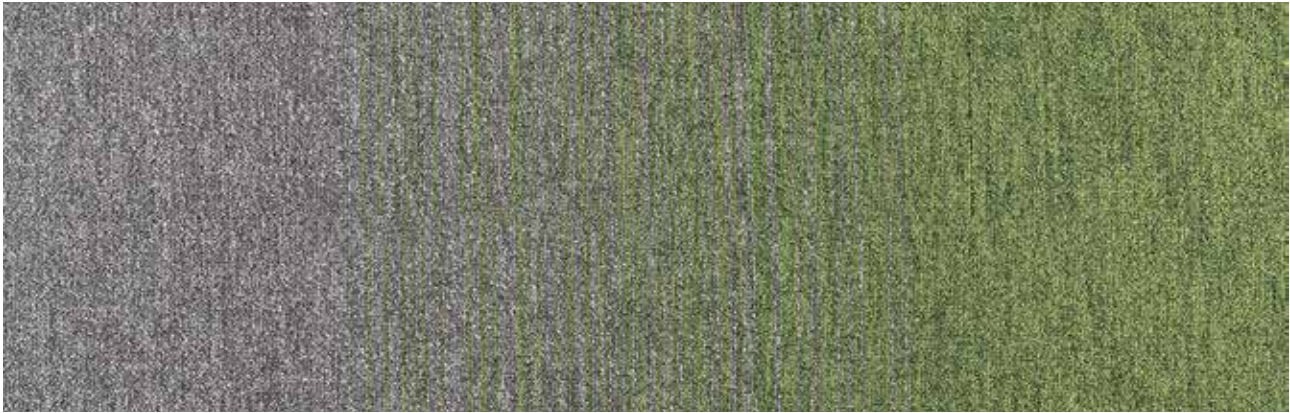

6384273



Cobalt SDN 64042




6384260



Cobalt SDN 64060



Cobalt SDN 64042

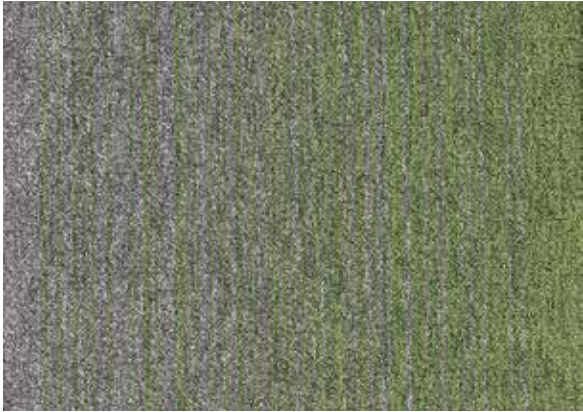

6384273



Cobalt SDN 64073



6384260



6384290



6384263



6384249



Cobalt SDN 64042




6384263



Cobalt SDN 64063



Manufacturing type	Herstellungsart	Mode fabrication	Productie methode		tufted 1/10"		
Construction	Struktur	Structure	Structuur		loop pile		
Pile composition	Polmaterial	Couche d'usure	Poolsamenstelling		100% PA 6		
Dye method	Farbgestaltung	Coloration	Kleurverwerking		solution dyed		
Primary backing	Trägermaterial	Premier dossier	Tuftdoek		polyester fleece		
Secondary backing	Rückenausrüstung	Dossier	Rug		GREENBASE modified bitumen		
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m²	550	(+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m²	4.300	(+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	3,0	(+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	6,0	(+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m²	164.000	(+/-)
Size	Abmessung	Dimension	Afmeting		cm	50 x 50	
Packing	Verpackung	Emballage	Verpakking			20 per box	5 m²
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307		33	heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307		LC 2	
Castor chair	Stuhllolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985		r = 2,5	A (intensive)
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986		≤ 0,2%	
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1		BF1-S1	loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0	
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≤ 10³	
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m²/K/W	0,070	
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,15	
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	24 dB	
				ISO 10140	ΔL	39 dB	(1000 Hz)
Light fastness	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02		8	
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105 X12		4-5	wet/dry
Water fastness	Wasserechtheit	Solidité à l'eau	Waterechtheid	ISO 105 E01		5	colour/staining



These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.

Ecofuse

De plakcompound
The adhesive compound



Ecofuse is een ecologisch alternatief voor de latex plakcompound in kamerbreed en tapijttegels. We vervangen de latex in de compound door PVB (PolyVinyl Butyral).

Ecofuse is an ecological alternative to the latex adhesive compound in broadloom and carpet tiles. We replace the latex in the compound with PVB (PolyVinyl Butyral).



Ecofuse in onze tapijten

Bij Tapibel gebruiken we Ecofuse in heel wat van onze tapijten. Zowel in kamerbreed als in tapijttegel.

Ecofuse in our carpets

At Tapibel, we use Ecofuse in many of our carpets. Both in broadloom and in carpet tile.

Kamerbreed

De precoat

De laag tussen de garens en de rug van het tapijt. De precoat zorgt ervoor dat de garens stevig blijven plakken.

De secondary backing

De onderste laag en rug van het tapijt. Ecofuse wordt tussen de garens en de rug toegevoegd als plakcompound. De rug zorgt ervoor dat het tapijt zijn vorm behoudt.


Broadloom

The precoat

The layer between the yarns and the backing of the carpet. The precoat ensures that the yarns adhere firmly.

The secondary carpet backing

The lower layer and backing of the carpet. Ecofuse is added between the yarns and the carpet backing as an adhesive compound. The backing ensures that the carpet retains its shape.

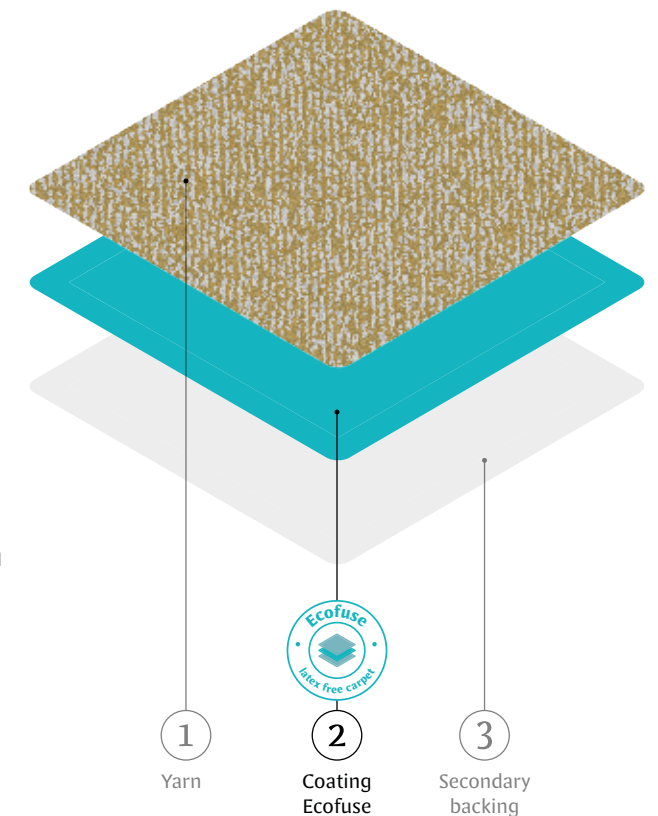

Tapijttegel


De precoat

De laag tussen de garens en de rug van het tapijt. De precoat zorgt ervoor dat de garens stevig blijven plakken.

Carpet tile

The precoat

The layer between the yarns and the backing of the carpet. The precoat ensures that the yarns stick together.

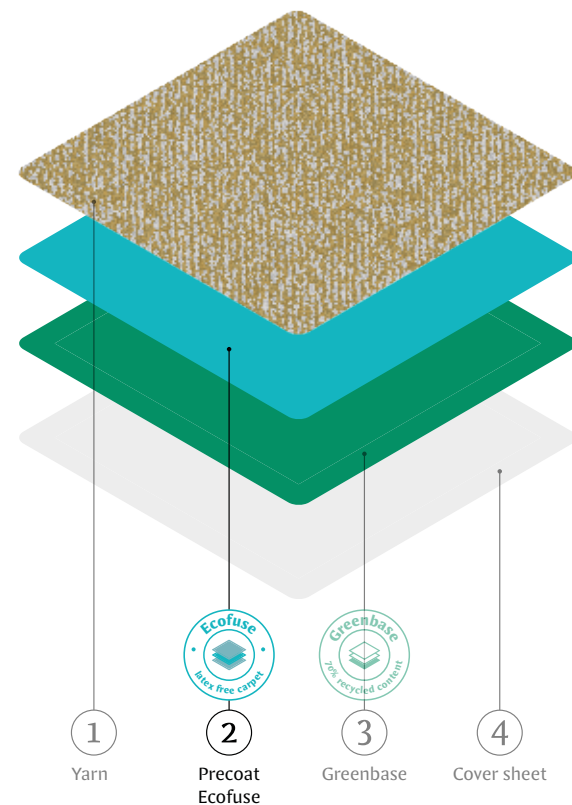

Greenbase

De gemodificeerde bitumenbacking
The modified bitumen backing



Greenbase is een duurzamer alternatief voor de backing van tapijttegels. De backing of rug van de tapijttegels zorgt ervoor dat het tapijt zijn vorm en stevigheid behoudt. Deze laag is opgebouwd uit bitumen. In deze duurzamere variant is het krijt in de gemodificeerde bitumen gemaakt van 70% gerecycleerd materiaal. Daardoor is het minder schadelijk voor de planeet.

Greenbase is a more sustainable alternative for the general carpet tile backing. In this more sustainable variant, the chalk in the modified bitumen is made from 70% recycled material. This makes it less harmful for the planet.

Greenbase in onze tegels


De backing

De backing is de rug van het tapijt. Greenbase vormt de basis. Een cover sheet maakt het geheel compleet. Dankzij de stevige rug, behoudt de tapijttegel zijn vorm.


Greenbase in our tiles

The carpet backing

The carpet backing is literally the back of the carpet. Greenbase forms the basis. A cover sheet completes the construction. Thanks to the sturdy backing, the carpet tile retains its shape.

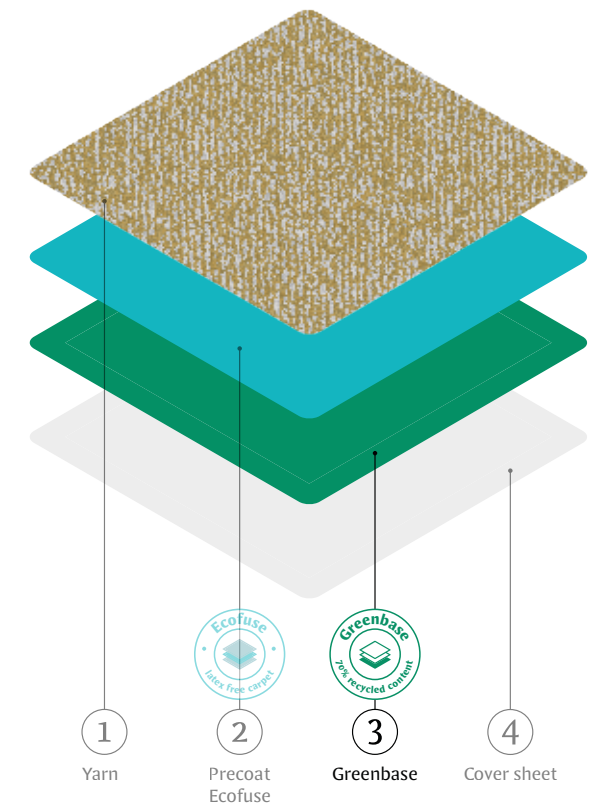

MORE INSPIRATION

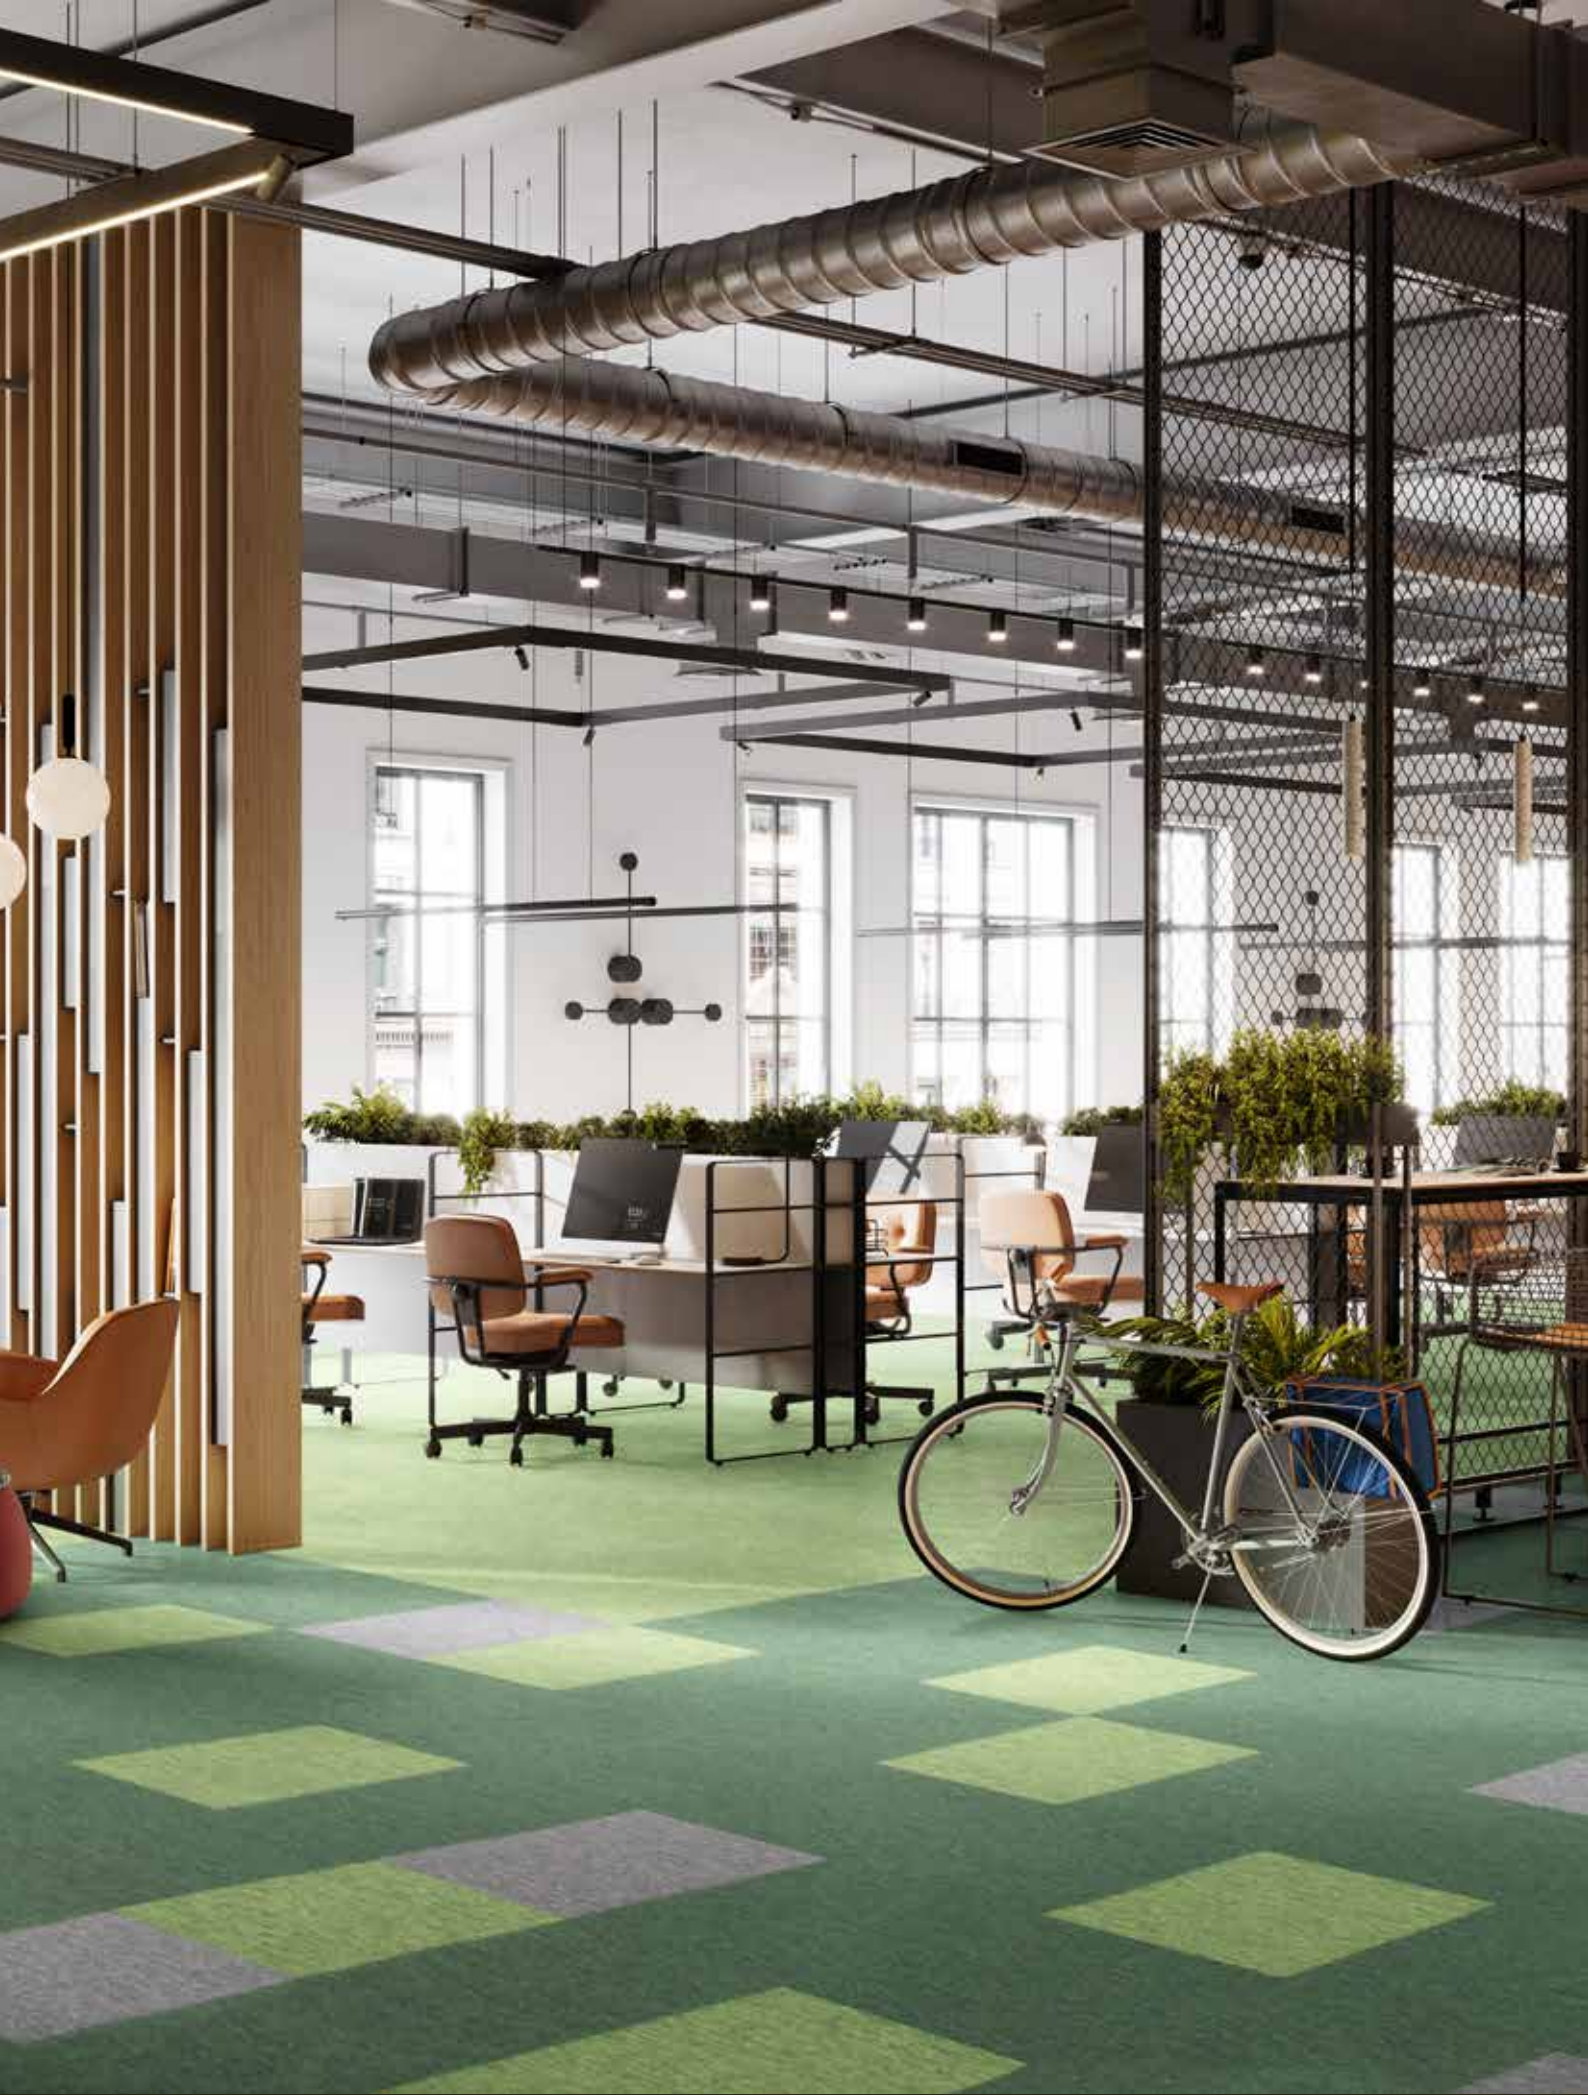





















www.tapibel.be - sales@tapibel.be

Tapibel

Industrielaan 4 - Nolimpark 1319

B-3900 Pelt - Belgium

Tel : +32 11 80 48 50

